


## DIAPHRAGM VALVE CVAD15

### Description

This device is used to deviate part of the discharge pressure of the master cylinder to the pilot line in order to activate the rest of the slave cylinders pneumatically with the pneumatic actuators. The diaphragm is always installed in a master-slave configuration between the discharge hose of the master cylinder and its check valve.

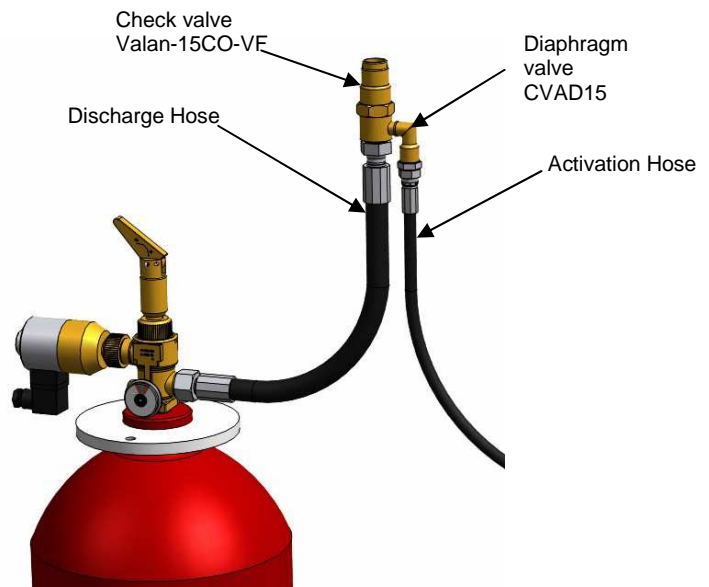

### Technical information

DIAPHRAGM VALVE CVAD15	
Location	Discharge manifold
Material	Brass
Connection to the check valve	1/2" BSP Female
Connection to the discharge hose	1/2" BSP Male
Connection to the activation hose	1/4" BSP Female
<b>Approvals</b>	<b>UL-EX26559</b> <b>FM-3046929</b>

WARNING: This type of diaphragm valve CVAD15, is manufactured and approved to be used with IG-541 Gas. These products are not designed for other use or purpose. If product user has any doubt regarding the application or product use, please contact +34 947 28 11 08. Every not approved use or application or / and any other not approved modification of the product or its function may cause serious accidents or / and personal damages. SIEX 2001 S.L. is not responsible for any non-approved use of the application.

IMPORTANT: SIEX 2001 S.L. reserves the right to change or modify without previous notice any data or specification due to changes or modification in order to improve the products presented.