


## MODULAR CYLINDER

### Description

Clean Agent Fire Extinguishing System listed by UL (Underwriters Laboratories) and approved by FM (Factory Mutual), composed by a modular cylinder filled with FK-5-1-12 and over-pressurized with nitrogen (IG-100) at 360, 464, 493, 610, 725 and 798 psi (25, 32, 34, 42, 50 and 55 bar).

### Scheme

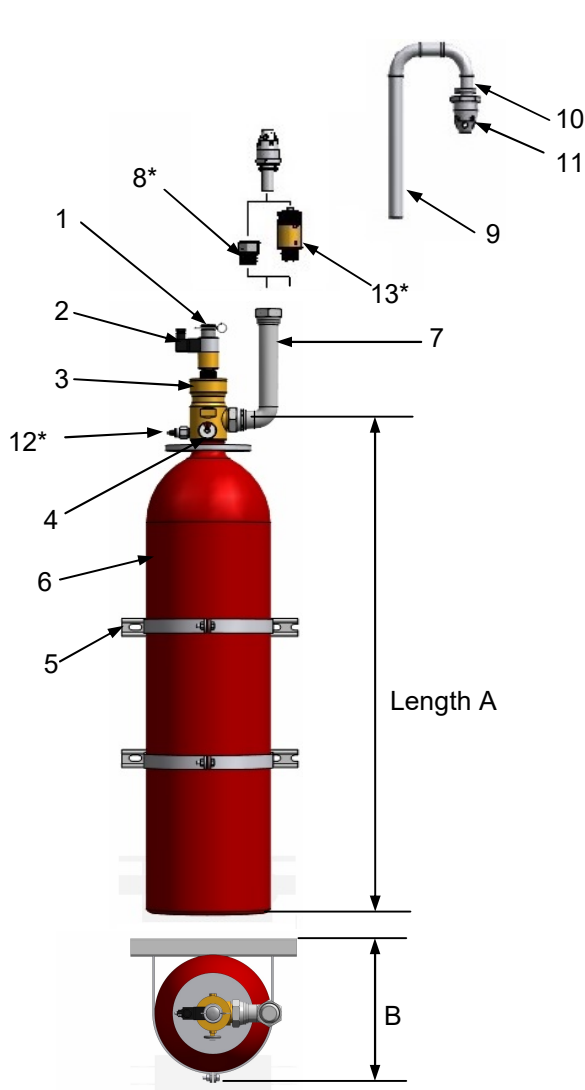

### Technical information

Item	Description	Quantity	Part number
1	Manual actuator	1	227DM / 227DMS
2	Electrical actuator	1	227SOL / 227SOLC
3	Container valve	1	RGS-MAM-11/12/20/40/50/80
4	Pressure gauge	1	UF40H-P25 / UF40H-P32 / UF40H-P34 / UF40H-P42 / UF40H-P50 / UF40H-P55
5	Brackets	-	POHCxxx
6	Cylinder	1	227MXXXUFX-X
7	Discharge hose	1	DH15 / DH151 / DH16 / DH161 / DH20 / DH201 / DH21 / DH211 / FH-15COUF / FH-20HC / FH-25HC / FH-40HC / FH-50HC / FH-80HC / FH-80HC34
8*	Adapter	1	POADxxMH
9	Discharge pipe	1	-
10	Discharge nozzle	1	FEDRxx
11	Calibrated plate	1	POPCxx
12	Pressure switch	1	POPRENxxx / POPRENCxx
13*	Check valve	1	VALAN-15CO / VALAN-20A / VALAN-21A / VALAN-40-23 / VALAN-50-125 / VALAN-80

\*These accessories are optional.

Part Number	Nominal Capacity (liters)	Nominal Capacity (ft <sup>3</sup> )	Nominal Diameter (mm)	Nominal Diameter (in)	Length A (mm)	Length A (in)	B (mm)	B (mm)	Valve Type	Outlet thread valve
NCM2UFV-1	2	0,07	100	3,94	355	13,99	166	6,54	RGS-MAM-11-4	W21.8x1/14"
NCM2UFJ-1	2,7	0,10	108	4,26	425	16,75	174	6,856	RGS-MAM-11-4	W21.8x1/14"
NCM2UFV-1	2,7	0,10	100	3,94	450	17,73	166	6,54	RGS-MAM-11-4	W21.8x1/14"
NCM2UFV-2	2,7	0,10	100	3,94	450	17,73	166	6,54	RGS-MAM-11-4	W21.8x1/14"
NCM4UFJ-1	4,7	0,17	108	4,26	690	27,19	174	6,856	RGS-MAM-11-4	W21.8x1/14"
NCM4UFJ-2	4,7	0,17	140	5,52	450	17,73	206	8,116	RGS-MAM-11-4	W21.8x1/14"
NCM4UFJ-3	4,7	0,17	140	5,52	445	17,53	206	8,116	RGS-MAM-11-4	W21.8x1/14"
NCM4UFV-1	4,7	0,17	115	4,53	583,5	22,99	181	7,131	RGS-MAM-11-4	W21.8x1/14"
NCM4UFV-2	4,7	0,17	140	5,52	421	16,59	206	8,116	RGS-MAM-11-4	W21.8x1/14"
NCM4UFV-3	4,7	0,17	140	5,52	421	16,59	206	8,116	RGS-MAM-11-4	W21.8x1/14"
NCM6UFM-1	6	0,21	152,4	6,00			218,4	8,605	RGS-MAM-11-4	W21.8x1/14"
NCM6UFJ-1	6,7	0,24	140	5,52	575	22,66	206	8,116	RGS-MAM-11-4	W21.8x1/14"
NCM6UFJ-3	6,7	0,24	140	5,52	575	22,66	206	8,116	RGS-MAM-11-4	W21.8x1/14"
NCM6UFV-1	6,7	0,24	140	5,52	574	22,62	206	8,116	RGS-MAM-11-4	W21.8x1/14"
NCM6UFV-3	6,7	0,24	140	5,52	574	22,62	206	8,116	RGS-MAM-11-4	W21.8x1/14"
NCM9UFM-3	9	0,32	177,8	7,01			243,8	9,606	RGS-MAM-11-4	W21.8x1/14"
NCM9UFM-4	9	0,32	177,8	7,01			243,8	9,606	RGS-MAM-11-4	W21.8x1/14"
NCM12UFM-1	12	0,42	254	10,01			320	12,61	RGS-MAM-11-4	W21.8x1/14"
NCM13UFAA-1	13	0,46	245	9,65	375	14,78	311	12,25	RGS-MAM-11-4	W21.8x1/14"
NCM13UFV-1	13,4	0,47	140	5,52	1065	41,96	206	8,116	RGS-MAM-11-4	W21.8x1/14"
NCM13UFV-3	13,4	0,47	204	8,04	550	21,67	270	10,64	RGS-MAM-11-4	W21.8x1/14"
NCM13UFV-5	13,4	0,47	204	8,04	570	22,46	270	10,64	RGS-MAM-11-4	W21.8x1/14"
NCM13UFB-2	13,4	0,47	203	8,00	585	23,05	269	10,6	RGS-MAM-11-4	W21.8x1/14"
NCM13UFJ-1	13,4	0,47	204	8,04	580	22,85	270	10,64	RGS-MAM-11-4	W21.8x1/14"
NCM16UFM-4	16	0,56	254	10,01	458,8	18,08	320	12,61	RGS-MAM-11-4	W21.8x1/14"
NCM2UFV-2	2	0,07	100	3,94	355	13,99	166	6,54	RGS-MAM-12-4	W21.8x1/14"
NCM2UFJ-2	2,7	0,10	108	4,26	425	16,75	174	6,856	RGS-MAM-12-4	W21.8x1/14"
NCM2UFV-3	2,7	0,10	100	3,94	450	17,73	166	6,54	RGS-MAM-12-4	W21.8x1/14"
NCM2UFV-4	2,7	0,10	100	3,94	450	17,73	166	6,54	RGS-MAM-12-4	W21.8x1/14"
NCM4UFJ-4	4,7	0,17	108	4,26	690	27,19	174	6,856	RGS-MAM-12-4	W21.8x1/14"
NCM4UFJ-5	4,7	0,17	140	5,52	450	17,73	206	8,116	RGS-MAM-12-4	W21.8x1/14"
NCM4UFJ-6	4,7	0,17	140	5,52	445	17,53	206	8,116	RGS-MAM-12-4	W21.8x1/14"
NCM4UFV-4	4,7	0,17	115	4,53	583,5	22,99	181	7,131	RGS-MAM-12-4	W21.8x1/14"
NCM4UFV-5	4,7	0,17	140	5,52	421	16,59	206	8,116	RGS-MAM-12-4	W21.8x1/14"
NCM4UFV-6	4,7	0,17	140	5,52	421	16,59	206	8,116	RGS-MAM-12-4	W21.8x1/14"
NCM6UFM-2	6	0,21	152,4	6,00			218,4	8,605	RGS-MAM-12-4	W21.8x1/14"
NCM6UFJ-2	6,7	0,24	140	5,52	575	22,66	206	8,116	RGS-MAM-12-4	W21.8x1/14"
NCM6UFJ-4	6,7	0,24	140	5,52	575	22,66	206	8,116	RGS-MAM-12-4	W21.8x1/14"
NCM6UFV-2	6,7	0,24	140	5,52	574	22,62	206	8,116	RGS-MAM-12-4	W21.8x1/14"
NCM6UFV-4	6,7	0,24	140	5,52	574	22,62	206	8,116	RGS-MAM-12-4	W21.8x1/14"
NCM9UFM-5	9	0,32	177,8	7,01			243,8	9,606	RGS-MAM-12-4	W21.8x1/14"
NCM9UFM-6	9	0,32	177,8	7,01			243,8	9,606	RGS-MAM-12-4	W21.8x1/14"
NCM12UFM-2	12	0,42	254	10,01			320	12,61	RGS-MAM-12-4	W21.8x1/14"
NCM13UFAA-2	13	0,46	245	9,65	375	14,78	311	12,25	RGS-MAM-12-4	W21.8x1/14"
NCM13UFV-2	13,4	0,47	140	5,52	1065	41,96	206	8,116	RGS-MAM-12-4	W21.8x1/14"
NCM13UFV-4	13,4	0,47	204	8,04	550	21,67	270	10,64	RGS-MAM-12-4	W21.8x1/14"

Part Number	Nominal Capacity (liters)	Nominal Capacity (ft <sup>3</sup> )	Nominal Diameter (mm)	Nominal Diameter (in)	Length A (mm)	Length A (in)	B (mm)	B (in)	Valve Type	Outlet thread valve
NCM13UFV-6	13,4	0,47	204	8,04	570	22,46	270	10,64	RGS-MAM-12-4	W21.8x1/14"
NCM13UFB-4	13,4	0,47	203	8,00	585	23,05	269	10,6	RGS-MAM-12-4	W21.8x1/14"
NCM13UFJ-2	13,4	0,47	204	8,04	580	22,85	270	10,64	RGS-MAM-12-4	W21.8x1/14"
NCM16UFM-6	16	0,56	254	10,01	458,8	18,08	320	12,61	RGS-MAM-12-4	W21.8x1/14"
NCM6UFM-3	6	0,21	152,4	6,00			218,4	8,605	RGS-MAM-20	3/4" BSP
NCM6UFJ-5	6,7	0,24	140	5,52	575	22,66	206	8,116	RGS-MAM-20	3/4" BSP
NCM6UFJ-6	6,7	0,24	140	5,52	575	22,66	206	8,116	RGS-MAM-20	3/4" BSP
NCM6UFV-5	6,7	0,24	140	5,52	574	22,62	206	8,116	RGS-MAM-20	3/4" BSP
NCM6UFV-6	6,7	0,24	140	5,52	574	22,62	206	8,116	RGS-MAM-20	3/4" BSP
NCM9UFM-1	9	0,32	177,8	7,01			243,8	9,606	RGS-MAM-20	3/4" BSP
NCM9UFM-2	9	0,32	177,8	7,01			243,8	9,606	RGS-MAM-20	3/4" BSP
NCM12UFM-3	12	0,42	254	10,01		0,00	320	12,61	RGS-MAM-20	3/4" BSP
NCM13UFAA-3	13	0,46	245	9,65	375	14,78	311	12,25	RGS-MAM-20	3/4" BSP
NCM13UFV-7	13,4	0,47	140	5,52	1065	41,96	206	8,116	RGS-MAM-20	3/4" BSP
NCM13UFV-8	13,4	0,47	204	8,04	550	21,67	270	10,64	RGS-MAM-20	3/4" BSP
NCM13UFV-9	13,4	0,47	204	8,04	570	22,46	270	10,64	RGS-MAM-20	3/4" BSP
NCM13UFB-6	13,4	0,47	203	8,00	585	23,05	269	10,6	RGS-MAM-20	3/4" BSP
NCM13UFJ-3	13,4	0,47	204	8,04	580	22,85	270	10,64	RGS-MAM-20	3/4" BSP
NCM16UFM-2	16	0,56	254	10,01	458,8	18,08	320	12,61	RGS-MAM-20	3/4" BSP
NCM21UFM	21	0,74	305	12,02			371	14,62	RGS-MAM-20	3/4" BSP
NCM25UFAA	25	0,88	300	11,82	461	18,16	366	14,42	RGS-MAM-20	3/4" BSP
NCM26UFB	26,8	0,95	203	8,00	1045	41,17	269	10,6	RGS-MAM-20	3/4" BSP
NCM26UFJ-1	26,8	0,95	204	8,04	1030	40,58	270	10,64	RGS-MAM-20	3/4" BSP
NCM26UFV-1	26,8	0,95	204	8,04	1025	40,39	270	10,64	RGS-MAM-20	3/4" BSP
NCM26UFJ-2	26,8	0,95	229	9,02	850	33,49	295	11,62	RGS-MAM-20	3/4" BSP
NCM26UFV-2	26,8	0,95	229	9,02	853,6	33,63	295	11,62	RGS-MAM-20	3/4" BSP
NCM26UFJ-3	26,8	0,95	229	9,02	850	33,49	295	11,62	RGS-MAM-20	3/4" BSP
NCM26UFV-3	26,8	0,95	229	9,02	853,6	33,63	295	11,62	RGS-MAM-20	3/4" BSP
NCM26UFV-4	26,8	0,95	229	9,02	880	34,67	295	11,62	RGS-MAM-20	3/4" BSP
NCM26UFV-5	26,8	0,95	229	9,02	853,6	33,63	295	11,62	RGS-MAM-20	3/4" BSP
NCM28UFM-1	28,3	1,00	228,6	9,01	806,5	31,78	294,6	11,61	RGS-MAM-20	3/4" BSP
NCM28UFM-2	28,3	1,00	228,6	9,01	830,25	32,71	294,6	11,61	RGS-MAM-20	3/4" BSP
NCM38UFAA	38	1,34	300	11,82	664	26,16	366	14,42	RGS-MAM-20	3/4" BSP
NCM40UFJ-1	40	1,41	204	8,04	1500	59,10	270	10,64	RGS-MAM-20	3/4" BSP
NCM40UFV-1	40,2	1,42	204	8,04	1475	58,12	270	10,64	RGS-MAM-20	3/4" BSP
NCM40UFB-2	40	1,41	229	9,02	1215	47,87	295	11,62	RGS-MAM-20	3/4" BSP
NCM40UFJ-2	40	1,41	229	9,02	1240	48,86	295	11,62	RGS-MAM-20	3/4" BSP
NCM40UFV-2	40,2	1,42	229	9,02	1215,4	47,89	295	11,62	RGS-MAM-20	3/4" BSP
NCM40UFJ-3	40	1,41	229	9,02	1240	48,86	295	11,62	RGS-MAM-20	3/4" BSP
NCM40UFN-1	40	1,41	229	9,02	1212	47,75	295	11,62	RGS-MAM-20	3/4" BSP
NCM40UFV-3	40,2	1,42	229	9,02	1215,4	47,89	295	11,62	RGS-MAM-20	3/4" BSP
NCM40UFN-2	40	1,41	229	9,02	1270	50,04	295	11,62	RGS-MAM-20	3/4" BSP
NCM40UFV-4	40,2	1,42	229	9,02	1245	49,05	295	11,62	RGS-MAM-20	3/4" BSP
NCM40UFV-5	40,2	1,42	229	9,02	1215,4	47,89	295	11,62	RGS-MAM-20	3/4" BSP
NCM61UFAA	61	2,15	300	11,82	1018	40,11	366	14,42	RGS-MAM-40	1" or 1 1/2" BSP
NCM67UFB-1	67,5	2,38	267	10,52	1500	59,10	333	13,12	RGS-MAM-40	1" or 1 1/2" BSP
NCM67UFJ	67,5	2,38	267	10,52	1500	59,10	333	13,12	RGS-MAM-40	1" or 1 1/2" BSP

Part Number	Nominal Capacity (liters)	Nominal Capacity (ft <sup>3</sup> )	Nominal Diameter (mm)	Nominal Diameter (in)	Length A (mm)	Length A (in)	B (mm)	B (in)	Valve Type	Outlet thread valve
NCM67UFV-1	67,5	2,38	267	10,52	1470	57,92	333	13,12	RGS-MAM-40	1" or 1 1/2" BSP
NCM67UFC	67,5	2,38	267	10,52	1440	56,74	333	13,12	RGS-MAM-40	1" or 1 1/2" BSP
NCM67UFR	67,5	2,38	267	10,52	1500	59,10	333	13,12	RGS-MAM-40	1" or 1 1/2" BSP
NCM67UFV-2	68	2,40	360	14,18	900	35,46	426	16,78	RGS-MAM-40	1" or 1 1/2" BSP
NCM80UFJ	80	2,82	267	10,52	1730	68,16	333	13,12	RGS-MAM-40	1" or 1 1/2" BSP
NCM80UFB-1	80	2,82	267	10,52	1740	68,56	333	13,12	RGS-MAM-40	1" or 1 1/2" BSP
NCM80UFV-1	80	2,82	267	10,52	1710	67,37	333	13,12	RGS-MAM-40	1" or 1 1/2" BSP
NCM80UFV-2	80	2,82	267	10,52	1710	67,37	333	13,12	RGS-MAM-40	1" or 1 1/2" BSP
NCM80UFV-3	80	2,82	267	10,52	1780	70,13	333	13,12	RGS-MAM-40	1" or 1 1/2" BSP
NCM80UFC	80	2,82	267	10,52	1675	66,00	333	13,12	RGS-MAM-40	1" or 1 1/2" BSP
NCM80UFR	80	2,82	267	10,52	1725	67,97	333	13,12	RGS-MAM-40	1" or 1 1/2" BSP
NCM80UFW	80	2,82	267	10,52	1675	66,00	333	13,12	RGS-MAM-40	1" or 1 1/2" BSP
NCM80UFV-4	80	2,82	360	14,18	1030	40,58	426	16,78	RGS-MAM-40	1" or 1 1/2" BSP
NCM81UFM-2	81,5	2,88	323,8	12,76	1152,5	45,41	389,8	15,36	RGS-MAM-40	1" or 1 1/2" BSP
NCM84UFAA-1	84	2,97	300	11,82	1345	52,99	366	14,42	RGS-MAM-40	1" or 1 1/2" BSP
NCM86UFM	86	3,04	323,8	12,76			389,8	15,36	RGS-MAM-40	1" or 1 1/2" BSP
NCM84UFAA-2	84	2,97	300	11,82	1343	52,91	366	14,42	RGS-MAM-50	2" BSP
NCM84UFAA-3	84	2,97	300	11,82	1343	52,91	366	14,42	RGS-MAM-50	2" BSP
NCM84UFM-1	84	2,97	406	16,00	805,6	31,74	472	18,6	RGS-MAM-50	2" BSP
NCM84UFM-2	84	2,97	406	16,00	805,6	31,74	472	18,6	RGS-MAM-50	2" BSP
NCM100UFV-1	100	3,53	360	14,18	1240	48,86	426	16,78	RGS-MAM-40	1" or 1 1/2" BSP
NCM100UFC	100	3,53	356	14,03	1220	48,07	422	16,63	RGS-MAM-40	1" or 1 1/2" BSP
NCM100UFR	100	3,53	356	14,03	1310	51,61	422	16,63	RGS-MAM-40	1" or 1 1/2" BSP
NCM100UFR-2	100	3,53	360	14,18	1240	48,86	426	16,78	RGS-MAM-40	1" or 1 1/2" BSP
NCM108UFAA-1	108,4	3,83	374	14,74	1148	45,23	440	17,34	RGS-MAM-50	2" BSP
NCM108UFAA-2	108,4	3,83	374	14,74	1148	45,23	440	17,34	RGS-MAM-50	2" BSP
NCM120UFB-1	120	4,24	406	16,00	1350	53,19	472	18,6	RGS-MAM-50	2" BSP
NCM120UFB-2	120	4,24	406	16,00	1350	53,19	472	18,6	RGS-MAM-50	2" BSP
NCM120UFV-1	120	4,24	360	14,18	1460	57,52	426	16,78	RGS-MAM-40	1" or 1 1/2" BSP
NCM120UFC	120	4,24	356	14,03	1440	56,74	422	16,63	RGS-MAM-40	1" or 1 1/2" BSP
NCM120UFR	120	4,24	356	14,03	1530	60,28	422	16,63	RGS-MAM-40	1" or 1 1/2" BSP
NCM120UFV-2	120	4,24	360	14,18	1490	58,71	426	16,78	RGS-MAM-40	1" or 1 1/2" BSP
NCM127UFAA-1	127	4,48	374	14,74	1319	51,97	440	17,34	RGS-MAM-50	2" BSP
NCM127UFAA-2	127	4,48	374	14,74	1319	51,97	440	17,34	RGS-MAM-50	2" BSP
NCM140UFV-1	140	4,94	360	14,18	1690	66,59	426	16,78	RGS-MAM-50	2" BSP
NCM140UFV-2	140	4,94	360	14,18	1690	66,59	426	16,78	RGS-MAM-50	2" BSP
NCM140UFV-3	140	4,94	360	14,18	1745	68,75	426	16,78	RGS-MAM-50	2" BSP
NCM140UFV-4	140	4,94	360	14,18	1745	68,75	426	16,78	RGS-MAM-50	2" BSP
NCM140UFC-1	140	4,94	356	14,03	1660	65,40	422	16,63	RGS-MAM-50	2" BSP
NCM140UFC-2	140	4,94	356	14,03	1660	65,40	422	16,63	RGS-MAM-50	2" BSP
NCM140UFR-1	140	4,94	356	14,03	1755	69,15	422	16,63	RGS-MAM-50	2" BSP
NCM140UFR-2	140	4,94	356	14,03	1755	69,15	422	16,63	RGS-MAM-50	2" BSP
NCM140UFV-5	140	4,94	360	14,18	1720	67,77	426	16,78	RGS-MAM-50	2" BSP
NCM140UFV-6	140	4,94	360	14,18	1720	67,77	426	16,78	RGS-MAM-50	2" BSP
NCM143UFM-1	143	5,05	406,4	16,01	1305	51,42	472,4	18,61	RGS-MAM-50	2" BSP
NCM143UFM-2	143	5,05	406,4	16,01	1305	51,42	472,4	18,61	RGS-MAM-50	2" BSP
NCM143UFM-3	143	5,05	406	16,00	1305	51,42	472	18,6	RGS-MAM-50	2" BSP

Part Number	Nominal Capacity (liters)	Nominal Capacity (ft <sup>3</sup> )	Nominal Diameter (mm)	Nominal Diameter (in)	Length A (mm)	Length A (in)	B (mm)	B (in)	Valve Type	Outlet thread valve
NCM143UFM-4	143	5,05	406	16,00	1305	51,42	472	18,6	RGS-MAM-50	2" BSP
NCM147UFB-1	147	5,19	406	16,00	1312		472	18,6	RGS-MAM-50	2" BSP
NCM147UFB-2	147	5,19	406	16,00	1312		472	18,6	RGS-MAM-50	2" BSP
NCM148UFB-1	148,5	5,24	508	20,02	911,2		574	22,62	RGS-MAM-50	2" BSP
NCM148UFB-2	148,4	5,24	508	20,02	911,2		574	22,62	RGS-MAM-50	2" BSP
NCM150UFB-1	150	5,30	406	16,00	1596	62,88	472	18,6	RGS-MAM-50	2" BSP
NCM150UFB-2	150	5,30	406	16,00	1596	62,88	472	18,6	RGS-MAM-50	2" BSP
NCM150UFC-1	150	5,30	406	16,00	1380	54,37	472	18,6	RGS-MAM-50	2" BSP
NCM150UFC-2	150	5,30	406	16,00	1380	54,37	472	18,6	RGS-MAM-50	2" BSP
NCM150UFV-1	150	5,30	360	14,18	1790	70,53	426	16,78	RGS-MAM-50	2" BSP
NCM150UFV-2	150	5,30	360	14,18	1790	70,53	426	16,78	RGS-MAM-50	2" BSP
NCM150UFC-3	150	5,30	356	14,03	1770	69,74	422	16,63	RGS-MAM-50	2" BSP
NCM150UFC-4	150	5,30	356	14,03	1770	69,74	422	16,63	RGS-MAM-50	2" BSP
NCM150UFR-1	150	5,30	356	14,03	1860	73,28	422	16,63	RGS-MAM-50	2" BSP
NCM150UFR-2	150	5,30	356	14,03	1860	73,28	422	16,63	RGS-MAM-50	2" BSP
NCM150UFV-3	150	5,30	360	14,18	1840	72,50	426	16,78	RGS-MAM-50	2" BSP
NCM150UFV-4	150	5,30	360	14,18	1840	72,50	426	16,78	RGS-MAM-50	2" BSP
NCM152UFM-1	152	5,37	406	16,00	1381,1	54,42	472	18,6	RGS-MAM-50	2" BSP
NCM152UFM-2	152	5,37	406	16,00	1381,1	54,42	472	18,6	RGS-MAM-50	2" BSP
NCM180UFC	180	6,35	406	16,00	1650	65,01	472	18,6	RGS-MAM-50	2" BSP
NCM180UFB-1	180	6,35	462	18,20	1266	49,88	528	20,8	RGS-MAM-50	2" BSP
NCM180UFM-1	180	6,35	406	16,00	1611,3	63,49	472	18,6	RGS-MAM-50	2" BSP
NCM180UFV-1	180	6,35	406	16,00	1690	66,59	472	18,6	RGS-MAM-50	2" BSP
NCM180UFV-2	180	6,35	406	16,00	1690	66,59	472	18,6	RGS-MAM-50	2" BSP
NCM180UFB-2	180	6,35	462	18,20	1591	62,69	528	20,8	RGS-MAM-80	3" Grooved
NCM180UFB-3	180	6,35	462	18,20	1266	49,88	528	20,8	RGS-MAM-80	3" Grooved
NCM180UFM-2	180	6,35	406	16,00	1611,3	63,49	472	18,6	RGS-MAM-80	3" Grooved
NCM180UFV-3	180	6,35	406	16,00	1690	66,59	472	18,6	RGS-MAM-80	3" Grooved
NCM227UFB	227	8,01	508	20,02	1318	51,93	574	22,62	RGS-MAM-80	3" Grooved
NCM229UFM	229	8,08	508	20,02			574	22,62	RGS-MAM-80	3" Grooved
NCM240UFB	240	8,47	462	18,20	1655,1	65,21	528	20,8	RGS-MAM-80	3" Grooved
NCM246UFM-1	246	8,68	558,8	22,02	1203,3	47,41	624,8	24,62	RGS-MAM-80	3" Grooved
NCM246UFM-2	246	8,68	558,8	22,02	1205	47,48	624,8	24,62	RGS-MAM-80	3" Grooved
NCM275UFB	275	9,71	508	20,02	1585	62,45	574	22,62	RGS-MAM-80	3" Grooved
NCM365UFM	365	12,88	610	24,03			676	26,63	RGS-MAM-80	3" Grooved
NCM368UFM	368	12,99	610	24,03	1501,7	59,17	676	26,63	RGS-MAM-80	3" Grooved
NCM368UFB	369	13,03	610	24,03	1483	58,43	676	26,63	RGS-MAM-80	3" Grooved
NCM454UFM	454	16,03	762	30,02	1248,5	49,19	828	32,62	RGS-MAM-80	3" Grooved
NCM501UFM	501	17,69	762	30,02	1356,5	53,45	828	32,62	RGS-MAM-80	3" Grooved

Note: These lengths are approximately due to the differences made in the manufacturing process.

WARNING: This type of modular cylinder, are manufactured and approved to be used in fixed extinguishing installations with FK-5-1-12. This product is not designed for other use or purpose. If product user has any doubt regarding the application or product use, please contact +34 947 28 11 08. Every not approved use or application or / and any other not approved modification of the product or its function may cause serious accidents or / and personal damages. SIEX 2001 S.L. is not responsible for any non-approved use of the application.

IMPORTANT: SIEX 2001 S.L. reserves the right to change or modify without previous notice any data or specification due to changes or modification in order to improve the products presented.